

ADHESIVE PRODUCT SPECIFICATION

CJA5015 Hot Melt Adhesive


Application: Premium Extended Pot Life Polyolefin Hot Melt “50 Hour Energy” for bonding purpose in the packaging industry, for instance for closing folding boxes, wrap-around, tray erectors and especially deep-freeze packaging.

**Characteristics/
Directives:** 105

Processing Temp.:	140-180°C (284-356°F)
Open Time:	4-6 seconds
Setting Time:	.5-1 seconds

Tested according to our test methods. Customer trials are recommended.

Technical Data:	Density [g/cm ³]:	approx.. 0.95
	Softening point:	approx.. 115°C (239°F)
	Appearance:	white – translucent melt Polyolefin base hot melt

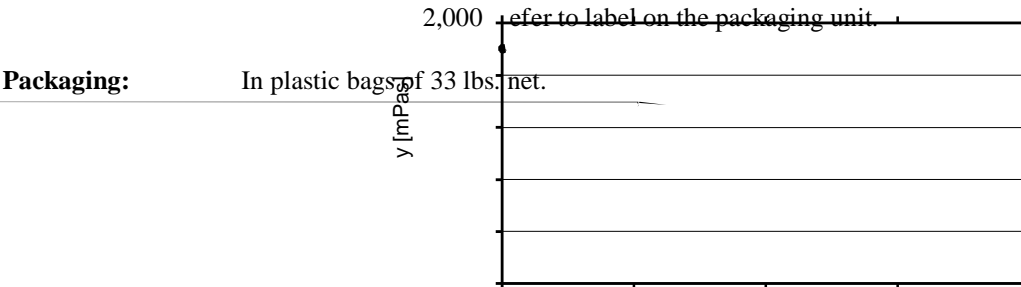

Remarks: For further information concerning handling, transport and disposal, please refer to the Material Safety Data Sheet. Our information on this data sheet is based on test results from our laboratories as well.

Glue Machinery Corporation
4234 Boston Street, Baltimore, MD 21224
888.202.2468 – Fax: 410.761.5127 – info@gluemachinery.com
www.gluemachinery.com

